


Data Sheet FA

Framing Anchor

Multi - purpose fixing that can be used for connecting roof timbers, joist trimmings, studding and general timber frame construction. Slotted design allows bending on site to suit

all configurations. Manufactured from 1.2mm thick galvanised steel. Safe working load 3.5kN per pair when using BPC Sheradised Square Twisted Nails 30x3.75mm.

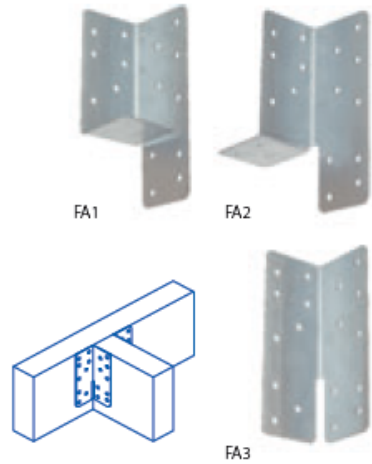

| Product Reference | Type | Height | Box Qty. |
|-------------------|-----------|--------|----------|
| FA1 | LH / RH | 125mm | 125 |
| FA2 | LH / RH | 125mm | 125 |
| FA3 | Universal | 125mm | 200 |

Produced from galvanised steel to BS EN 10346:2009 + G275 as standard, or stainless steel grade 304 to BS EN 10088-2 Grade 1.4301, available to order.

